



**PRODUCT NAME:**

SUPER THERMAL

**PRODUCT CODE/S:**

CL7064, CL7065

**KEY FEATURES:**

- Deko-Tex approved
- 15 gauge Nylon/Spandex liner with durable nitrile coating
- Superior breathability allows effective moisture control
- High level of abrasion resistance with excellent dexterity
- Great grip in dry and slightly oil environments
- Anti-hand fatigue knitted technology
- Breathable nitrile coating
- Enhanced tactile sensitivity
- Extended cuff for superior fit
- Flexible knuckle coating for ease of movement
- Extended protection up to the knuckles in dry and slightly oily environments

**MATERIAL**

NYLON/SPANDEX NITRILE MICRO FOAM


**APPLICATION**

Dry handling, Small part handling in slightly oily environments, Fabrication and assembly operations, Maintenance and MRO, Warehousing, Construction and tool handling, Engineering and manufacturing operations

**ORDERING DETAILS**

| SIZE      | CODE   | PACKAGING         |
|-----------|--------|-------------------|
| 9 LARGE   | CL7064 | 120PCS PER CARTON |
| 10 XLARGE | CL7065 | 120PCS PER CARTON |

**SPECIFICATION**



COLOUR: GREY

- Abrasion: 4
- Blade Cut: 1
- Tear: 3
- Puncture: 1
- ISO Cut: X

**SIZE CHART**

| Measurements in mm     | CL7064 (9LARGE) | CL7065 (10XLARGE) |
|------------------------|-----------------|-------------------|
| Hand Length (A)        | 192             | 204               |
| Hand Circumference (B) | 229             | 254               |

**STANDARDS**



CAT II

EN388



4332




Breathable


**CERTIFICATION LEGEND**



MECHANICAL HAZARDS EN 388: 2000

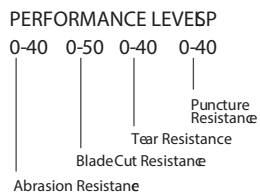

MECHANICAL HAZARDS EN 388: 2016

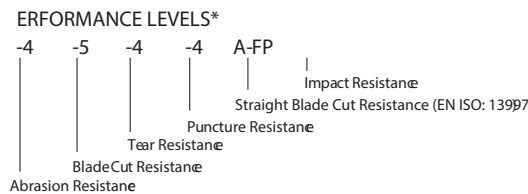

\* If tests are not performed or are not applicable 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

