



PRODUCT NAME:

SELF ADHESIVE FLOOR SANDING SHEETS

PRODUCT CODE/S:

460MM X 310MM: AP140, AP141, AP142, AP143, AP144, AP145, AP146, AP147, AP148

50PER PACK 115X280: AP063, AP064, AP065, AP066, AP067

AP101, AP102, AP103, AP104, AP105, AP106, AP107, AP108


KEY FEATURES:

High quality abrasive grain, resin on resin bonded to a vulcanized fibre backing.
 Vulcanized fibre backing
 Strong, long life

MATERIAL:

Aluminium Oxide

SIZE CHART

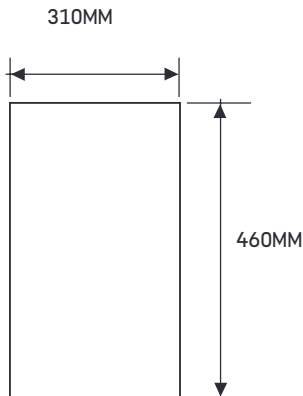

GRIT SIZE	GRADE	CODES	SIZE	APPLICATION
40-60	COARSE	AP140, AP141, AP142, AP143, AP144, AP101, AP102, AP103, AP104, AP105,	460MM X 310MM	MATERIAL REMOVAL
80-100	MEDIUM	AP145, AP146, AP106, AP107	460MM X 310MM	LEVELING
120-UPWARDS	FINE	AP147, AP148, AP108	460MM X 310MM	FINISHING
40-60	COARSE	AP063, AP064	115MM X 280MM	MATERIAL REMOVAL
80-100	MEDIUM	AP065, AP066	115MM X 280MM	LEVELING
120-UPWARDS	FINE	AP067	115MM X 280MM	FINISHING

STORAGE

IT IS RECOMMENDED THAT ALL COATED ABRASIVE PRODUCTS SHOULD BE STORED AT CONSTANT LEVELS OF TEMPERATURE AND HUMIDITY WITHIN THE RANGES OF 18-22°C, 50-65% RH. THEY SHOULD BE KEPT AWAY FROM DAMP (OR COLD) WALLS, WINDOWS OR FLOORS TO AVOID POSSIBLE MOISTURE ABSORPTION. EQUALLY STORAGE ADJACENT TO HEAT SOURCES E.G. STEAM PIPES, RADIATORS, HOT AIR DUCTS, OVENS, ETC.,

