



PRODUCT NAME:

PRE PACKED WET & DRY SANDING PAPER Per PACK

PRODUCT CODE/S:

5 SHEETS: PPA005, PPA006, PPA007, PPA008

50 SHEETS: AP030, AP031, AP034, AP035, AP037, AP038, AP039, AP040, AP041, AP042, AP043, AP044, AP045, AP046

KEY FEATURES:

Safeline general purpose Glass Paper on a "B" weight backing. Use to smooth or remove surface imperfections and general roughness. Suitable for use on wood, paint, varnish or plaster
Sands paint, wood, or metal

MATERIAL:


Silicon Carbide (wet and dry)

Silicon carbide paper, also known as 'wet and dry' paper, is suitable for both dry and wet sanding. It is suitable for sanding hardwood and plywood, soft metal like brass and aluminium, and plastic; also used for smoothing glass edges and frosting glass surfaces. It is fast-cutting and almost as hard as diamond, but it is brittle so the coarser grades will wear fast if used on hard metal.


SIZE CHART

GRIT SIZE	GRADE	CODES	SIZE	APPLICATION
40-60	COARSE	PPA007, AP030	230MMX280MM	MATERIAL REMOVAL
80-100	MEDIUM	PPA006, AP031	230MMX280MM	LEVELING
120-UPWARDS	FINE	PPA005, AP034, AP035, AP037, AP038, AP039, AP040, AP041, AP042, AP043, AP044, AP045, AP046	230MMX280MM	FINISHING
ASSORTED	FINE, MEDIUM, COARSE	PPA008	230MMX280MM	

A. 1/3 sheet sander, cut as shown

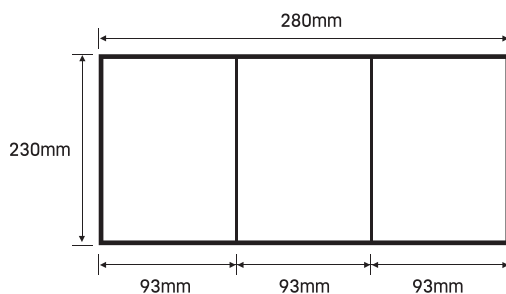

B. 1/2 sheet sander, cut as shown

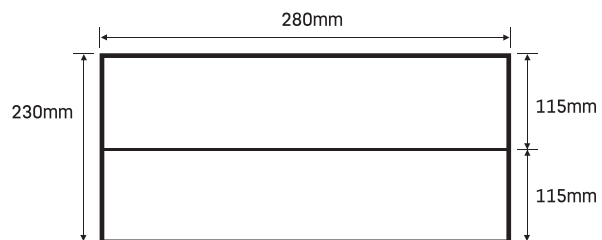

STORAGE

IT IS RECOMMENDED THAT ALL COATED ABRASIVE PRODUCTS SHOULD BE STORED AT CONSTANT LEVELS OF TEMPERATURE AND HUMIDITY WITHIN THE RANGES OF 18-22°C, 50-65% RH. THEY SHOULD BE KEPT AWAY FROM DAMP (OR COLD) WALLS, WINDOWS OR FLOORS TO AVOID POSSIBLE MOISTURE ABSORPTION. EQUALLY STORAGE ADJACENT TO HEAT SOURCES E.G. STEAM PIPES, RADIATORS, HOT AIR DUCTS, OVENS, ETC.,

