



## PRODUCT NAME:

VELCRO DISCS 225MM C/W HOLES

## PRODUCT CODE/S:

PREPACKED 5 PER PACK: AD150, AD151, AD153, AD154, AD155, AD156, AD157

## KEY FEATURES:

Safeline Hook and loop backing. High performance aluminium oxide grain.  
Punched sanding sheets  
Strong and long lasting, easy to install and remove  
for use on wood, metal, plaster and filler.

## MATERIAL:


Aluminium Oxide

This man-made material is suitable for shaping, sanding and polishing hard metal such as iron and steel, but also effective on timber. Aluminium oxide cuts much faster and lasts longer than glass or garnet.

It is available on non-waterproof, cloth or waterproof backings.

## SIZE CHART

GRIT SIZE	GRADE	CODES	SIZE	APPLICATION
40-60	COARSE	AD150	225MM DIA	MATERIAL REMOVAL
80-100	MEDIUM	AD151	225MM DIA	LEVELING
120-UPWARDS	FINE	AD153 AD154 AD155 AD156 AD157	225MM DIA	FINISHING

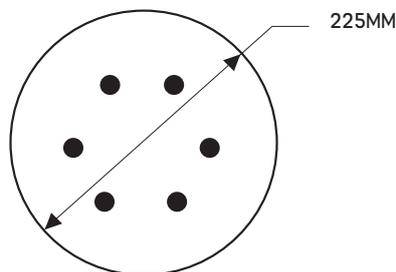

## STORAGE

IT IS RECOMMENDED THAT ALL COATED ABRASIVE PRODUCTS SHOULD BE STORED AT CONSTANT LEVELS OF TEMPERATURE AND HUMIDITY WITHIN THE RANGES OF 18-22°C, 50-65% RH. THEY SHOULD BE KEPT AWAY FROM DAMP (OR COLD) WALLS, WINDOWS OR FLOORS TO AVOID POSSIBLE MOISTURE ABSORPTION. EQUALLY STORAGE ADJACENT TO HEAT SOURCES E.G. STEAM PIPES, RADIATORS, HOT AIR DUCTS, OVENS, ETC.,

